


Perskoppelingen X serie

SAEJ516 ISO 12151-5

AGJ

JIC Buitendraad


GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)					Max W.P.		
	DN	Size	Inch	F	H	L	S				bar	PSI
X07JM03	5	03	3/16"	7/16"-20	25	50	12				415	6000
X08JM03	5	03	3/16"	1/2"-20	25	50	14				415	6000
X07JM04	6	04	1/4"	7/16"-20	25,5	53,5	12				450	6500
X08JM04	6	04	1/4"	1/2"-20	25,5	53,5	14				450	6500
X09JM04	6	04	1/4"	9/16"-18	26,6	54,6	15				450	6500
X08JM05	8	05	5/16"	1/2"-20	25,5	53,5	14				350	5000
X09JM05	8	05	5/16"	9/16"-18	26,6	54,6	15				350	5000
X12JM05	8	05	5/16"	3/4"-16	29,7	57,7	19				350	5000
X09JM06	10	06	3/8"	9/16"-18	26,6	57,1	15				450	6500
X12JM06	10	06	3/8"	3/4"-16	29,7	60,2	19				415	6000
X14JM06	10	06	3/8"	7/8"-14	34,3	64,8	24				350	5000
X12JM08	12	08	1/2"	3/4"-16	30,7	63,7	19				415	6000
X14JM08	12	08	1/2"	7/8"-14	35,3	68,3	24				350	5000
X17JM08	12	08	1/2"	1 1/16"-12	38,9	71,9	27				350	5000
X14JM10	16	10	5/8"	7/8"-14	35,5	71,3	24				350	5000
X17JM10	16	10	5/8"	1 1/16"-12	39,1	74,9	27				350	5000
X14JM12	20	12	3/4"	7/8"-14	37,3	77,8	27				350	5000
X17JM12	20	12	3/4"	1 1/16"-12	39,9	80,4	27				350	5000
X19JM12	20	12	3/4"	1 3/16"-12	41,6	82,1	32				280	4000
X21JM12	20	12	3/4"	1 5/16"-12	42,1	82,6	34				280	4000
X17JM16	25	16	1"	1 1/16"-12	41,9	92,9	32				280	4000
X21JM16	25	16	1"	1 5/16"-12	43,6	94,6	34				280	4000
X26JM16	25	16	1"	1 5/8"-12	46,8	97,8	42				280	4000
X26JM20	32	20	1 1/4"	1 5/8"-12	47,6	105,3	42				210	3000
X30JM20	32	20	1 1/4"	1 7/8"-12	52,8	110,5	50				140	2000
X30JM24	40	24	1 1/2"	1 7/8"-12	53	117,5	50				140	2000
X40JM32	50	32	2"	2 1/2"-12	63,4	133,4	65				105	1500



oa

Perskoppelingen X serie

SAEJ516 ISO 12151-5



Gekrompen moer

GSS Artikel nr	DKJ			JIC Wartel								Max W.P.	
	Slangmaat			Draad	Afmetingen (mm)					bar	PSI		
	DN	Size	Inch	F	H	L	S						
X07JF03	5	03	3/16"	7/16"-20	13,5	38,5	14				415	6000	
X08JF03	5	03	3/16"	1/2"-20	15	40	17				415	6000	
X07JF04	6	04	1/4"	7/16"-20	14	42	14				400	5800	
X08JF04	6	04	1/4"	1/2"-20	14,5	42,5	17				400	5800	
X09JF04	6	04	1/4"	9/16"-18	16,5	44,5	19				400	5800	
X08JF05	8	05	5/16"	1/2"-20	14,5	42,5	17				350	5000	
X09JF05	8	05	5/16"	9/16"-18	15,5	43,5	19				350	5000	
X12JF05	8	05	5/16"	3/4"-16	17,5	45,5	22				350	5000	
X09JF06	10	06	3/8"	9/16"-18	15,5	46	19				350	5000	
X12JF06	10	06	3/8"	3/4"-16	17,5	48	22				330	4800	
X14JF06	10	06	3/8"	7/8"-14	18,5	48	27				330	4800	
X12JF08	12	08	1/2"	3/4"-16	17,5	50,5	22				310	4500	
X14JF08	12	08	1/2"	7/8"-14	18,5	51,5	27				280	4000	
X17JF08	12	08	1/2"	1 1/16"-12	21,8	54,8	32				280	4000	
X14JF10	16	10	5/8"	7/8"-14	18,7	54,5	27				250	3600	
X17JF10	16	10	5/8"	1 1/16"-12	22	57,8	32				250	3600	
X14JF12	20	12	3/4"	7/8"-14	19,5	60	27				240	3500	
X17JF12	20	12	3/4"	1 1/16"-12	21,3	61,8	32				240	3500	
X19JF12	20	12	3/4"	1 3/16"-12	25	65,5	36				215	3100	
X21JF12	20	12	3/4"	1 5/16"-12	25,5	66	41				215	3100	
X17JF16	25	16	1"	1 1/16"-12	22,8	73,8	32				240	3500	
X21JF16	25	16	1"	1 5/16"-12	25,5	76,5	41				210	3000	
X26JF16	25	16	1"	1 5/8"-12	28,5	79,5	50				170	2500	
X26JF20	32	20	1 1/4"	1 5/8"-12	27,8	85,5	50				170	2500	
X30JF20	32	20	1 1/4"	1 7/8"-12	31,3	89	60				140	2000	
X30JF24	40	24	1 1/2"	1 7/8"-12	30	94,5	60				140	2000	
X40JF32	50	32	2"	2 1/2"-12	34	104	75				105	1500	


Perskoppelingen X serie

SAEJ516 ISO 12151-5

DKJ90

JIC Wartel 90°

GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)						Max W.P.	
	DN	Size	Inch	F	H	L	K	S			bar	PSI
X07JF90S03	5	03	3/16"	7/16"-20	21	46	18	14			415	6000
X08JF90S03	5	03	3-16"	1/2"-20	21	46	19	17			415	6000
X07JF90S04	6	04	1/4"	7/16"-20	25,5	53,5	20	14			400	5800
X08JF90S04	6	04	1/4"	1/2"-20	25,5	53,5	21	17			400	5800
X09JF90S04	6	04	1/4"	9/16"-18	25,5	53,5	23	19			400	5800
X08JF90S05	8	05	5/16"	1/2"-20	28	56	22	17			350	5000
X09JF90S05	8	05	5/16"	9/16"-18	28	56	24	19			350	5000
X12JF90S05	8	05	5/16"	3/4"-16	28	56	27	22			350	5000
X09JF90S06	10	06	3/8"	9/16"-18	30	60,5	23	19			350	5000
X12JF90S06	10	06	3/8"	3/4"-16	31	61,5	29	22			330	4800
X14JF90S06	10	06	3/8"	7/8"-14	31	61,5	31	27			330	4800
X12JF90S08	12	08	1/2"	3/4"-16	37	70	29	22			310	4500
X14JF90S08	12	08	1/2"	7/8"-14	38	71	33	27			280	4000
X17JF90S08	12	08	1/2"	1 1/16"-12	40	73	40	32			280	4000
X14JF90S10	16	10	5/8"	7/8"-14	43	79	33	27			250	3600
X17JF90S10	16	10	5/8"	1 1/16"-12	45	81	40	32			250	3600
X17JF90S12	20	12	3/4"	1 1/16"-12	55	95	43	32			240	3500
X19JF90S12	20	12	3/4"	1 3/16"-12	55	95	47	36			215	3100
X21JF90S12	20	12	3/4"	1 5/16"-12	55	95	49	41			215	3100
X21JF90S16	25	16	1"	1 5/16"-12	71	122	56	41			210	3000
X26JF90S16	25	16	1"	1 5/8"-12	71	122	61	50			170	2500
X26JF90S20	32	20	1 1/4"	1 5/8"-12	86	143	65	50			170	2500
X30JF90S20	32	20	1 1/4"	1 7/8"-12	86	143	70	60			140	2000
X30JF90S24	40	24	1 1/2"	1 7/8"-12	102	167	76	60			140	2000
X40JF90S320	50	32	2"	2 1/2"-12	137	207	104	75			105	1500




Gekrompen moer

Perskoppelingen X serie

SAEJ516 ISO 12151-5

DKJ45

JIC Wartel 45"

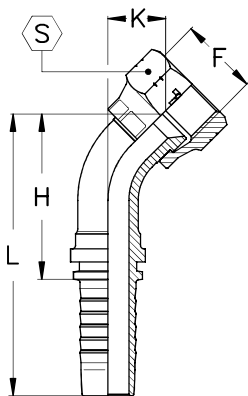


Gekrompen wartel

GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)						Max W.P.	
	DN	Size	Inch	F	H	L	K	S			bar	PSI
X07JF45S03	5	03	3/16"	7/16"-20	29	54	10	14			415	6000
X08JF45S03	5	03	3/16"	1/2"-20	30	55	11	17			415	6000
X07JF45S04	6	04	1/4"	7/16"-20	31	59	10	14			400	5800
X08JF45S04	6	04	1/4"	1/2"-20	32	60	11	17			400	5800
X09JF45S04	6	04	1/4"	9/16"-18	33	61	12	19			400	5800
X08JF45S05	8	05	5/16"	1/2"-20	33	61	11	17			350	5000
X09JF45S05	8	05	5/16"	9/16"-18	34	62	12	19			350	5000
X12JF45S05	8	05	5/16"	3/4"-16	36	64	14	22			350	5000
X09JF45S06	10	06	3/8"	9/16"-18	35,5	66	12	19			350	5000
X12JF45S06	10	06	3/8"	3/4"-16	37,5	68	14	22			330	4800
X14JF45S06	10	06	3/8"	7/8"-14	39,5	70	16	27			330	4800
X12JF45S08	12	08	1/2"	3/4"-16	41	74	14,5	22			310	4500
X14JF45S08	12	08	1/2"	7/8"-14	43	76	16	27			280	4000
X17JF45S08	12	08	1/2"	1 1/16"-12	45,5	78,5	19	32			280	4000
X14JF45S10	16	10	5/8"	7/8"-14	47	83	16	27			250	3600
X17JF45S10	16	10	5/8"	1 1/16"-12	50	86	19	32			250	3600
X17JF45S12	20	12	3/4"	7/8"-14	64	105	27	27			240	3500
X19JF45S12	20	12	3/4"	1 3/16"-12	57	97	20	32			240	3500
X21JF45S12	20	12	3/4"	1 5/16"-12	61	101	24	38			215	3100
X21JF45S16	25	16	1"	1 1/16"-12	83	134	35	32			240	3500
X21JF45S16	25	16	1"	1 5/16"-12	72	123	24	38			210	3000
X26JF45S16	25	16	1"	1 5/8"-12	76	127	28	50			170	2500
X26JF45S20	32	20	1 1/4"	1 5/8"-12	85	143	28	50			170	2500
X30JF45S20	32	20	1 1/4"	1 7/8"-12	88	144	32	60			140	2000
X40JF45S24	40	24	1 1/2"	1 7/8"-12	99	164	32	60			140	2000
X40JF45S32	50	32	2"	2 1/2"-12	132	202	43	75			105	1500

Perskoppelingen X serie

3


SAE J516/J512



SAE Buitendraad

GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)							
	DN	Size	Inch	F	H	L	S					
X10SM05	8	05	5/16"	5/8"-18	28,2	56,2	16					
X10SM06	10	06	3/8"	5/8"-18	28,2	58,7	16					
X17SM12	20	12	3/4"	1 1/16"-14	43,4	83,9	27					

SAE J516/J512




SAE Wartel

GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)							
	DN	Size	Inch	F	H	L	S	S1				
X10SF05	8	05	5/16"	5/8"-18	23,5	51,5	22	16				
X10SF06	10	06	3/8"	5/8"-18	23,5	54	22	16				
X17SF12	20	12	3/4"	1 1/16"-14	31,8	72,3	32	27				

Gekrompen wartel

SAE J516/J512

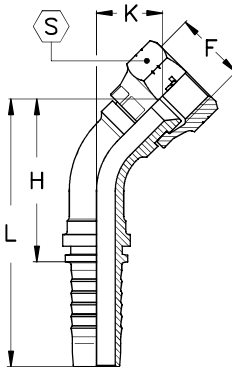


SAE Wartel 45°

GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)							
	DN	Size	Inch	F	H	L	K	S				
X10SF45S05	8	05	5/16"	5/8"-18	38	66	16	22				
X10SF45S06	10	06	3/8"	5/8"-18	39	69,5	16	22				
X17JF45S12	20	12	3/4"	1 1/16"-14	62	103	25	32				

Gekrompen wartel

SAE J516/J512




SAE Wartel 90°

GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)							
	DN	Size	Inch	F	H	L	K	S				
X10SF90S05	8	05	5/16"	5/8"-18	28	56	29	22				
X10SF90S06	10	06	3/8"	5/8"-18	31	61	31	22				
X17JF90S12	20	12	3/4"	1 1/16"-14	55	95	51	32				

Gekrompen wartel


Perskoppelingen X serie

UNF buitendraad oa



UNF buitendraad oa		UNF buitendraad											
		GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)						Max W.P.
			DN	Size	Inch	F	H	L	S				bar
oa	X07SMR04	6	04	1/4"	7/16"-20	23	51,5	14					350
oa	X08SMR04	6	04	1/4"	1/2"-20	23	51,5	17					350
oa	X09SMR04	6	04	1/4"	9/16"-18	24,5	53	17					250
oa	X09SMR05	8	05	5/16"	9/16"-18	24,5	53	17					250
oa	X09SMR06	10	06	3/8"	9/16"-18	24,5	55	17					250
oa	X12SMR06	10	06	3/8"	3/4"-16	26,5	57	24					250
oa	X12SMR08	12	08	1/2"	3/4"-16	27	60	24					250
oa	X14SMR08	12	08	1/2"	7/8"-14	30	63	25					200
oa	X17SMR08	12	08	1/2"	1 1/16"-12	34	67	32					200
oa	X14SMR10	16	10	5/8"	7/8"-14	30	66	25					200
oa	X17SMR10	16	10	5/8"	1 1/16"-12	34	70	32					200
oa	X17SMR12	20	12	3/4"	1 1/16"-12	35	76	32					200
oa	X21SMR12	20	12	3/4"	1 5/16"-12	36	77	38					160
oa	X21SMR16	25	16	1"	1 5/16"-12	37	92	38					160

ORFS Buitendraad



ORFS Buitendraad		ORFS			UNF buitendraad								
		GSS Artikel nr	Slangmaat			Draad	Afmetingen (mm)						Max W.P.
			DN	Size	Inch	F	H	L	S				bar
	X04ORM04	6	04	1/4"	9/16"-18	23,5	52	17					450
	X06ORM04	6	04	1/4"	11/16"-16	26	54,5	19					450
	X06ORM05	8	05	5/16"	11/16"-16	26	54,5	19					350
	X06ORM06	10	06	3/8"	11/16"-16	26	56,5	19					445
	X08ORM06	10	06	3/8"	13/16"-16	28	58,5	22					445
	X10ORM06	10	06	3/8"	1"-14	32,5	63	27					445
	X08ORM08	12	08	1/2"	13/16"-16	29	62	22					415
	X10ORM08	12	08	1/2"	1"-14	33,5	66,5	27					415
	X12ORM08	12	08	1/2"	1 3/16"-12	35	68	32					415
	X10ORM10	16	10	5/8"	1"-14	33,5	69,5	27					350
	X12ORM10	16	10	5/8"	1 3/16"-12	35	71	32					350
	X12ORM12	20	12	3/4"	1 3/16"-12	36	77	32					350
	X16ORM12	20	12	3/4"	1 7/16"-12	36,5	77,5	41					350
	X16ORM16	25	16	1"	1 7/16"-12	38	93	41					280
	X20ORM20	32	20	1 1/4"	1 11/16"-12	40	101	46					210
	X24ORM24	40	24	1 1/2"	2"-12	43	113,5	55					185

3